

Changes to Municipal Address Number Signs

Urban Area Requirements

The design, size and location of municipal address numbers and/or lot numbers in the urban area shall be no smaller than six inches in height and be in accordance with the design and location standard shown in this By-law.




Specifications:

1. Affix the civic number at a height between 2.0 metres (6.5 feet) and 2.5 metres (8.2 feet) above grade.
2. Ensure that every civic number shall be expressed in legible standard numeric digits at least:
 - 100 millimetres (4 inches) high with at least a 12 millimetre (½ inch) wide stroke, subject to 4(c)(ii); and
 - at least 200 millimetres (8 inches) high with at least a 20 millimetre (¾ inch) wide stroke where the building is setback from the travelled portion of the road between 18.0 metres (59 feet) and 30.0 metres (98 feet).
 - Add a directional arrow for units with side or back entrances, or any entrance that isn't visible from the street
 - If your garage faces the street, place an additional address number on the garage side to ensure clear visibility from the road.
 - Use high-contrast numbers to make sure they're easy to see at any time of day

Rural Area Requirements

Municipal address number signs in the rural area shall be attached to a post which is clearly visible from both sides of the road. The sign should be adjacent to the property line at the driveway.

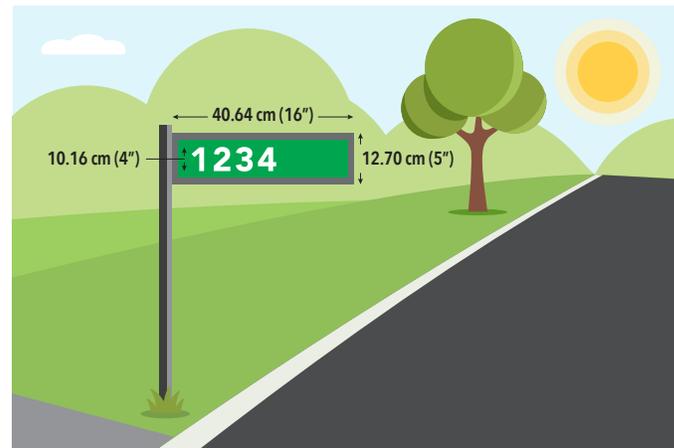

Specifications:

1. Flat aluminum or metal sign blank of 40.64 cm x 12.70 cm (16" x 5").
2. White numbers 10.16 cm (4") high on a green background.
3. Numbers and background to be made of engineering grade retro-reflective traffic sign sheeting.
4. Municipal address number signs in the rural area shall be attached to a post which is clearly visible from both sides of the road. The sign should be adjacent to the property line at the driveway.